


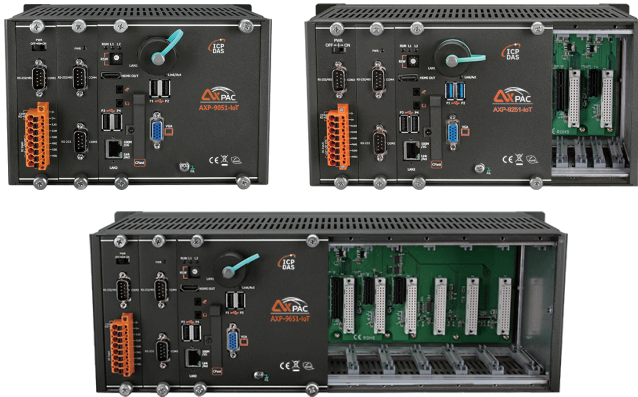

AXP-9051-IoT/AXP-9251-IoT/AXP-9651-IoT

-/2/6-slot Metal Standard PAC with i5-8365UE CPU and Win10 IoT

Features

- Windows 10 IoT Enterprise LTSC (64-bit)
- Intel® Core™ i5-8365UE Processor (1.6 ~ 4.1 GHz, 4C8T)
- 16 GB DDR4 SDRAM
- 128 GB SSD
- VGA / HDMI Display Output
- 2x 10/100/1000M Ethernet Ports
- Redundant Power Input



Introduction

The AXP-9000-IoT are Windows 10 IoT based PACs that combine computing, I/O, and operator interface into a single unit, and provide the perfect solution for integrating HMI, data acquisition and control in an individual PAC. It is equipped with an Intel Core i5-8365UE CPU, 0/2/6 I/O expansion slots and a variety of connectives including dual Gigabit Ethernet, VGA, HDMI, USB port, RS-232 and RS-485 interface. Local I/O slots are available to use our I-9K, I-97K, e-9K series I/O modules and remote I/O expansions are available to use our Ethernet I/O modules and RS-485 I/O modules.

AXP-9000-IoT has a built-in Windows 10 IoT Enterprise LTSC operating system, which can support both the Universal Windows App and traditional Windows applications simultaneously. For software development tools, it can maintain maximum sharing with Windows 10, and applications can be quickly ported to AXP-9000 and deployed in a variety of harsh environments.


What is Windows 10 IoT?



Windows 10 IoT is a member of the Windows 10 family that brings enterprise-class power, security and manageability to the Internet of Things. It leverages Windows' embedded experience, ecosystem and cloud connectivity, allowing organizations to create their Internet of Things with secure devices that can be quickly provisioned, easily managed, and seamlessly connected to an overall cloud strategy.

- Traditional Windows Shell with Advanced Lockdown Features
- Full Windows UI support (e.g. UWP, WinForms, etc)

Applications

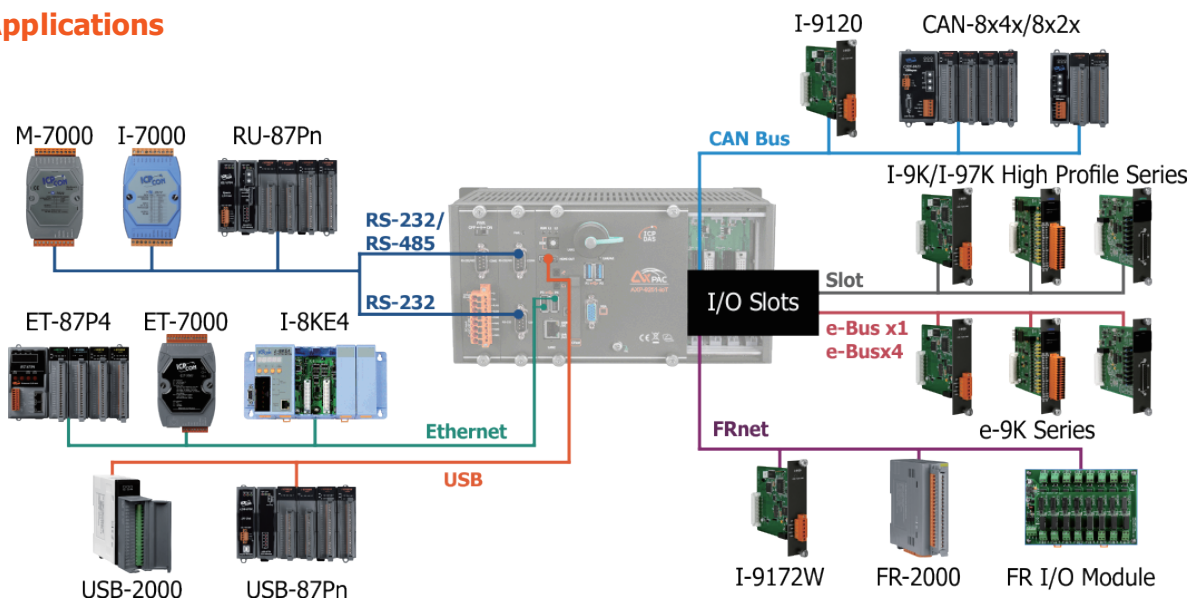


Specifications


Model	AXP-9051-IoT		AXP-9251-IoT	AXP-9651-IoT
Software				
OS	Windows 10 IoT Enterprise LTSC (64-bit)			
Service	IE11, FTP Server, IIS 7.0, ASP (Java Script, VB Script)			
Framework Support	.Net Compact Framework 3.5 ~ 4.8			
Multilanguage Support	English, German, French, Spanish, Portuguese, Russian, Italian, Korean, Japanese, Simplified Chinese, Traditional Chinese			
SDK Provided	DII for VC, DII for Visual Studio.Net			
Main Unit				
CPU	Intel® Core™ Whiskey Lake U i5-8365UE Processor (1.6 ~ 4.1 GHz, 4C8T)			
64-bit Hardware Serial Number	Yes, for software copy protection			
System Memory	16 GB DDR4 SDRAM (SODIMM slots with a 16 GB DDR4 x 1)			
Storage	1x128 GB SSD (SATAIII) / 1x32 GB CFast card (SATAIII)			
Non-Volatile Memory	128 KB MRAM / 16 KB EEPROM			
Real Time Clock	Provide seconds, minutes, hours, dates, day of week, month, year			
Watchdog Timer	Dual Watchdog Timer			
Display				
Signal	1 x VGA, 1 x HDMI			
Resolution	VGA 1920 x 1200 @ 60Hz HDMI 4096 x 2160 @ 30P			
Graphic Processor	Intel® UHD Graphics 620			
LED Indicators				
Status	1 x System, 2 x Power, 2 x Programmable			
I/O Expansion				
I/O Type	e9K, I-9K, I-97K series			
Slots	-	2 x serial/parallel bus 1 x e-Bus x1 1 x e-Bus x4	6 x serial/parallel bus 1 x e-Bus x1 1 x e-Bus x4	
COM Ports				
Ports	1 x RS-232 (3000 VDC Isolated), 1 x RS-485 (3000 VDC Isolated), 2 x RS-232/RS-485 (3000 VDC Isolated)			
HMI				
Buzzer	Yes			
Rotary Switch	1 x 10 Position (0 ~ 9)			
Power Switch	Yes			
Audio				
Cable	Microphone-in and Earphone-out			
Ethernet				
Ports	2 x RJ-45, 10/100/1000 Base-TX (Intel® I219LM)			
USB				
Ports	2 x USB 2.0, 2 x USB 3.0			
Power				
Capacity	80 W supply to CPU and backplane, 40 W supply to I/O expansion slots and USB ports, 120 W in total			
Input Range	+19 ~ 30 VDC (2 kV Isolated)			
Redundant Power Inputs	Yes, with one power relay (1 A @ 24 VDC) for alarm			
Consumption	30.5 W (Typical) 71 W (CPU Full Load)	31.5 W (Typical) 72 W (CPU Full Load)	32.6 W (Typical) 73 W (CPU Full Load)	
Mechanical				
Dimension (W x L x H)	239 x 164 x 133 mm	300 x 164 x 133 mm	422 x 164 x 133 mm	
Installation	DIN-Rail, Wall mounting			
Cooling Type	CPU Heat Sink and 180,000 hour long-life fan with Smart Fan function			
Environmental				
Operating Temperature	-25 ~ +60 °C			
Storage Temperature	-30 ~ +80 °C			
Humidity	10 ~ 90 % RH (non-condensing)			

Appearance


AXP-9051-IoT

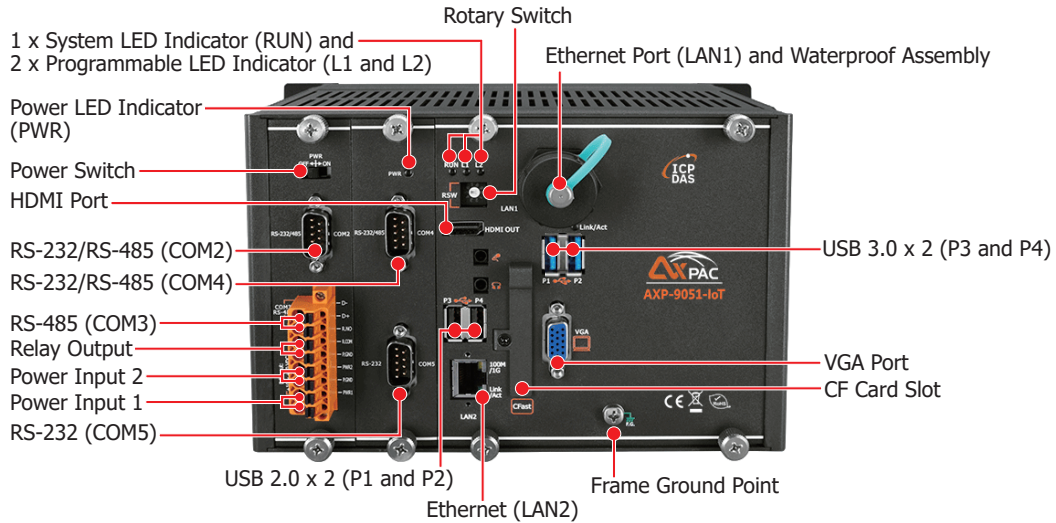

AXP-9251-IoT

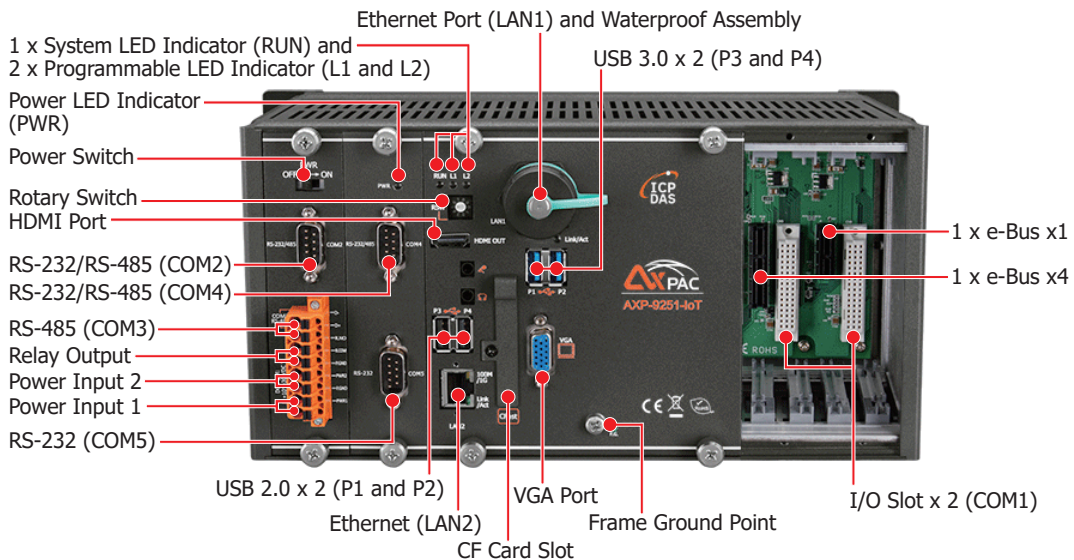


AXP-9651-IoT

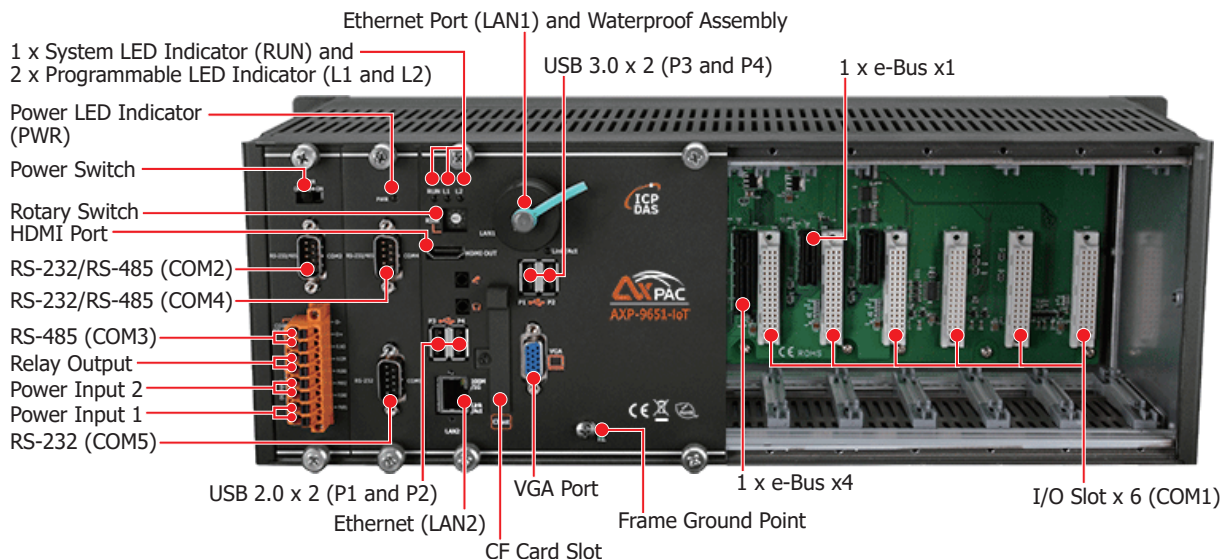


■ Dimensions (Units: mm)

AXP-9051-IoT/AXP-9251-IoT/AXP-9651-IoT

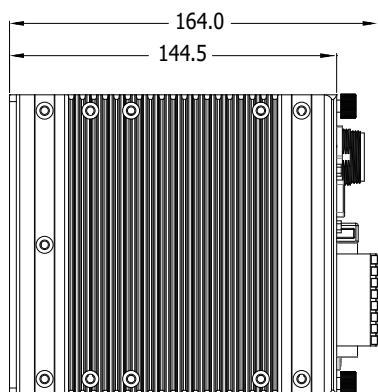


Left Side View

AXP-9051-IoT

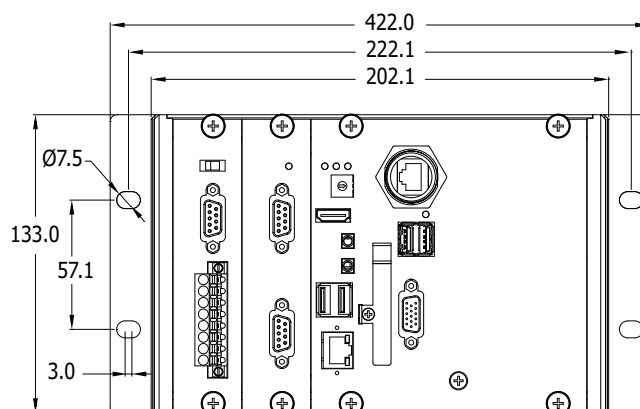


Front View

AXP-9251-IoT

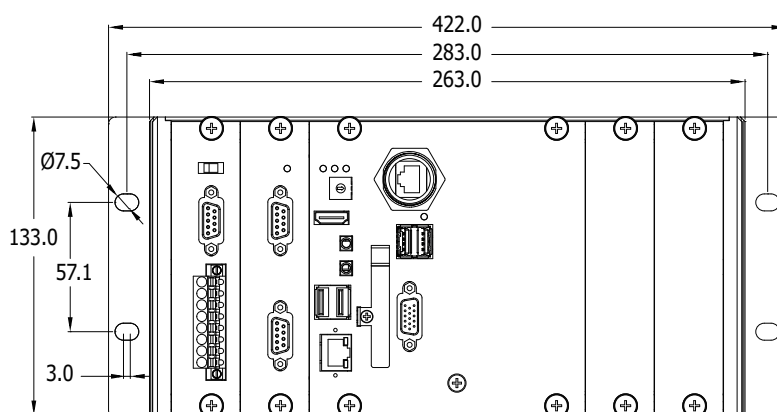

Front View

AXP-9651-IoT

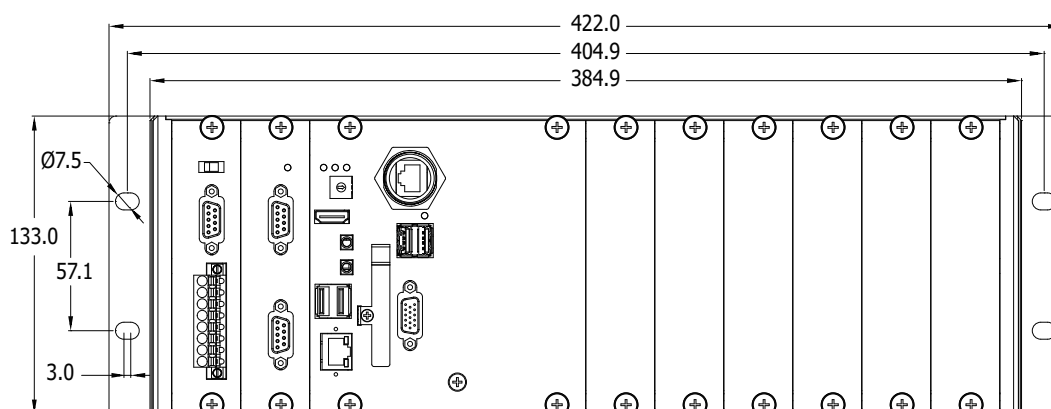

Front View

■ Ordering Information

AXP-9051-IoT CR	Metal Standard PAC with i5-8365UE CPU and Win10 IoT (RoHS)
AXP-9251-IoT CR	2-slot Metal Standard PAC with i5-8365UE CPU and Win10 IoT (RoHS)
AXP-9651-IoT CR	6-slot Metal Standard PAC with i5-8365UE CPU and Win10 IoT (RoHS)